

Tree Spade

For skid-steer loaders

FEATURES:

- Available in 3 series:
15° truncated series
25° modified truncated series
30° cone model
- Standard electric control joystick to function the hydraulic valve
- Overlapping blades to clean cut roots
- Adjustable blade legs slide to control ball depth
- Wide gate opening to engage tree easily
- 2 year limited warranty



25 Series Tree Spade



30 Series Tree Spade



15 Series Tree Spade



2625



3215




2030




4425

25 Series Tree Spades

Specifications	2625	3625	4425
A. Height (overall) - blades up (open)	48.0"	64.5"	64.5"
B. Height (overall) - blades down (closed)	52.0"	69.0"	69.0"
C. Height (shipping) - blades removed	32.0"	38.0"	38.0"
D. Frame Height	22.5"	22.5"	22.5"
E. Digging Depth	22.0"	31.0"	31.0"
F. Cutting Angle	25°	25°	25°
G. Overall Transport Width (gate closed)	56.0"	66.0"	63.0"
H. Width (overall) (gate open & blades up)	76.0"	88.5"	107.0"
I. Maximum Gate Opening	30.0"	40.0"	33.0"
J. Length (overall) (gate open)	52.0"	75.0"	68.0"
K. Transport Length (overall) (gate closed)	60.0"	68.0"	69.5"
L. Maximum Leg Adjustment	10.5"	10.5"	10.5"
Number of Blades	3	3	4
Ball Diameters Available	18" - 26"	24" - 36"	32" - 44"
Tree Diameter (trunk caliper)	1.5" - 2.5"	2" - 3.5"	3" - 4.5"
Ball Weight (lbs)	150# - 350#	250# - 1000#	1200# - 1500#
Flow Requirements (GPM)	10	10	10
Minimum Operating Pressure (PSI)	2250	2250	2250
Weight (lbs)	1100#	1500#	1825#
Rear Stabilizers Required (specify loader model)			



MODEL 2625 & 3625

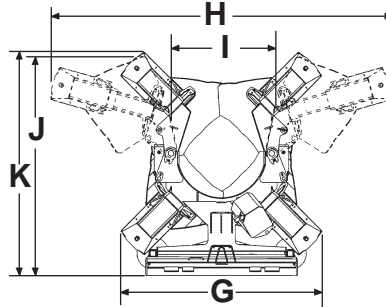

MODEL 4425

Specifications and design are subject to change without notice and without liability, therefore, whenever applicable specifications are in accordance with SAE standards.

Bradco's 26", 36", & 44", 25 Series Tree Spades provide a compromised digging angle between truncated and cone style to adapt to various soil conditions. The 25° angle and deep stroke of the blades produces several uniform ball sizes with one set of blades.

Bradco's 25° modified truncated model features pointed high tensile, abrasion resistant blades for easier ground penetration. Blade towers incorporate high density plastic slides that are self lubricating. Industry standard wire baskets for balled and burlap tree harvesting.

Other features include; an electric over hydraulic control with hand held joystick for operating the tree spade and rear stabilizers. Optional cord extension for the joystick control. Rear stabilizers for most skid-steer models. The inside frame is more compact allowing the skid-steer to handle a bigger spade size and work in tight spaces.

PH: 800-922-2981
 FX: (563) 922-2700
 P.O. Box 266
 Delhi, IA 52223-0266
 United States of America
 www.paladinbrands.com

