



VIRNIG

Multi-Purpose Bucket (Heavy Duty) Specifications

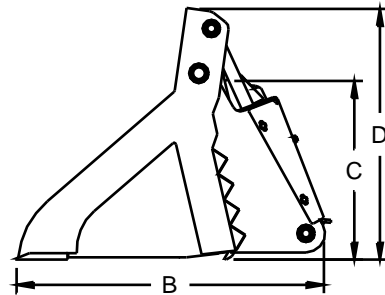

MODEL	HMPV66	HMPV72	HMPV78	HMPV84
A) Overall Bucket Width (Inches)	67.5	73.5	79.5	85.5
B) Bucket Depth (Inches)	36.3			
C) Bucket Height (Inches)	21.3			
D) Overall Height, Closed (Inches)	29.8			
E) Overall Height, Open (Inches)	46.0			
F) Clam Opening (Inches)	33.0			
G) Dozer Width (Inches)	65.9	71.9	77.9	83.9
Approximate Weight (Pounds)	1045	1100	1165	1220

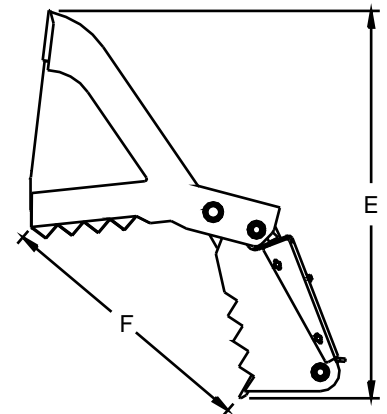

- Recommended for loaders with operating capacities greater than 2400 pounds.
- 3/4" X 6" weld on cutting edge with holes to accept bolt on edge.
(Bolt on Edges, Toothbars, and Weld on Teeth available.)
- 5/8" X 6" bolt on edges at rear of clam and front of dozer, 1 9/16" diameter hinge pins.
- 2 1/2" bore, 8 3/8" stroke cylinders with 1 1/2" rods and 1 1/4" cylinder pins.
- Hoses from bucket to loader and couplers are included.
- Cylinder Guards standard.
- Hydraulic Holding Valve available.

Specifications and designs are subject
to change without notice.

Virnig Manufacturing Inc.
800-648-2408
www.virnigmfg.com